

Digital Thermostat Module Model XH-W1308



Item: Digital Thermostat Module Model XH-W1308

Description: Digital Thermostat Module

Model: XH-W1308

Thermostat Range: -55°C to 120°C

Thermostat Accuracy: 0.1°C

Screen Color: Blue or Red

Power Supply: 5V/12V/24V, 220V;


Output: Max 10A

Temperature Probe Wire: 0.5meter, anti-water;

Whole Size: 100x48x28mm

Screen Size: 37x18mm


Flush/embed Size: 71x41mm

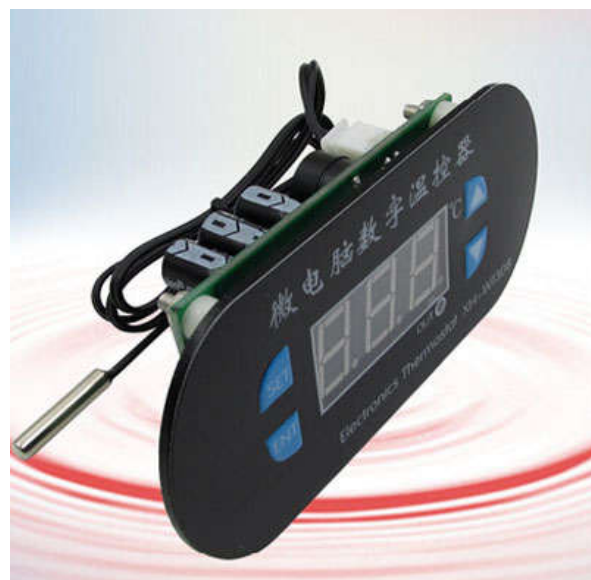

蓝色显示效果
高端/炫彩/上档次



红色显示效果
经济/柔和/常规性

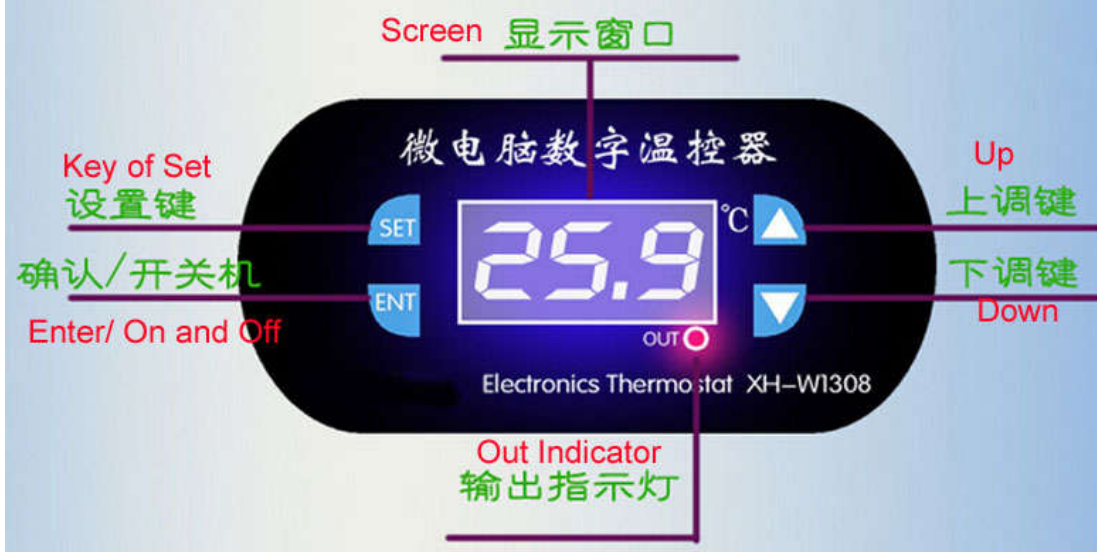

Code	Indicating	Set range	Initial Setting
P0	Mode set	H/C	C
P1	Return Difference Setting	0.1-30	2.0
P2	Up limit	+120	120
P3	Down limit	-55	-55
P4	Temp. adjust	+10 to -10	0
P5	Delay Time Start	0-10 minutes	0
P6	High temp.alarm	-50-120	off
P7	Data Lock	on/off	off
P8	Initial setting	on/off	off

How to set temperature?

When you switch on,the real temperature will be displayed; Push “SET” one time,the screen flash,and then push arrow(up or down) to set temperature;

How to enter more SETTING?

Long Pushing “SET”(5s)to enter more setting;And push “ENT” to confirm and return last menu;In the normal working,Long pushing can lead to Switching Off;

PO:Working mode

When you are first time to use this digital thermostat module,you must set to be “PO”;If works for heating,set to be “H”;If working for cooling,set to be “G”;

P1: temperature range value

For example: set Heating mode,temperature 37°C-40°C,then the value is 3.

P2-P3:to set temperature range for thermostat

P4:Adjust temperature error

This function is to adjust temperature error.If there has some error between real temperature and tested temperature,you can use this function. The adjusted value=tested value + adjusted value. For example,we tested temperature 25.6°C,but real temperature is 25.8°C,then you can set P4 to be 0.2,then the final temperature is $25.6^{\circ}\text{C} + 0.2 = 25.8^{\circ}\text{C}$;

P5:Delaying start

This function is used for compressor refrigerating.If you want this device to use on the refrigerator,then this value must be set.According to compressor returning pressure,generally set 3-6minutes;If you don't to control compressor,or don't need delaying function,please skip this set.

P6:Alarm for high temperature

When the real temperature is over than the set value,the screen will show “HHH” and the buzzer will alarm sound “di di di”,at the same time,will cut off output to protect electric circuit.

P7:Value lock.To prevent other people to modify the setting.After you set all values,you can enter “P7”,and set to be

“On”,then,all values couldn't be modified,unless enter “P7” again to set to be “Off”;

P8:Recovery all value to be initial state.