

Manual LED Dimmer 12-24V 8A



Name: _____

Company: _____

Phone: _____

Email: _____

Single color DC12-24V 8A manual knob dimmer controller 0%-100%. This dimming control LED light brightness switch is suitable for 5050-3528-2835 single color LED strips lights or other LED products.

SPECIFICATIONS


Model No.	VBD-DIAL-DM-8A
Operating Voltage	12-24V DC
Operating Current	8A max
Output Power	96W @ 12V / 192W @ 24V DC
Output Channel	1 Channel (Single Color)
Color	Beige/Almond
Material	Plastic
Dimmer Type	Rotary Knob Control
Connection Type	Screw Terminals
Dimming Range	0-100%
IP Rating	IP20 (Indoor Rated)
Dimensions	89 x 60 x 35mm

KEY FEATURES

- This product can be easily mounted onto walls.
- Used in various low voltage LED like cabinets, vanity, boats, desks, etc.
- This dial dimmer is applicable for various low voltage LED lighting applications wherein you desire to adjust the brightness.
- Most popular in dimming the low voltage LED lights that have high wattage.
- Please ensure that your LED load should not exceed more than 8A when using this dimmer.
- This knob-operated dimmer can adjust the light to the appropriate brightness.

Disclaimer

The data and information contained in this specification sheet are subject to change without notice; the ratings supplied are provided based on the product manufacturer. The information contained in this specification sheet should not be considered a warranty, expressed or implied, including, but not limited to, a warranty of merchantability or fitness for a particular purpose. In no event shall Veroboard be liable for any incidental or consequential damages resulting from the use, misuse, or inability to use the product. This exclusion applies regardless of whether such damages are sought based on breach of warranty, breach of contract, negligence, strict liability in tort, or any other legal theory.

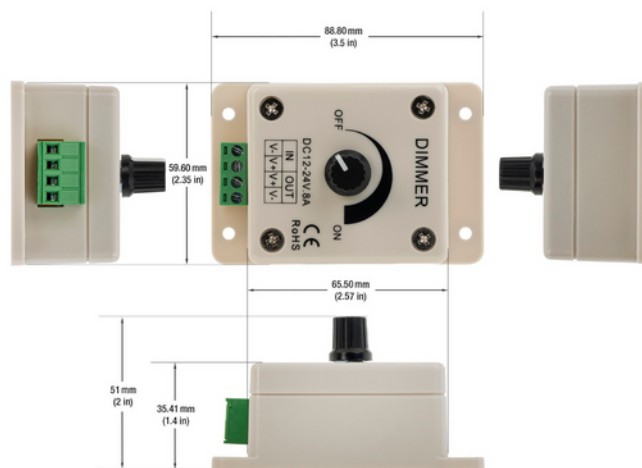

SKU: DIM614